

Outside Temperature Sensor

animeo Solo


animeo IB+

animeo IP

animeo KNX

animeo LON

SOLUTIONS FOR BUILDING CONTROL



Ref. 9001611

Temperature sensor for the measurement of exterior temperatures in combination with the Outside Sensor Box (ref. 9001606).


Delivered with solar radiation sensor protective housing.

Installation advantages

- > Very easy assembling on standard mast with 50 mm diameter.
- > Spring clamb connectors for save and solid wiring to the Outside Sensor Box.

Functional advantages

- > Precise measurement of exterior temperature values which can be displayed by °C or °F in the animeo building control solutions.
- > Protective housing to prevent measurement influence by spiders and birds.

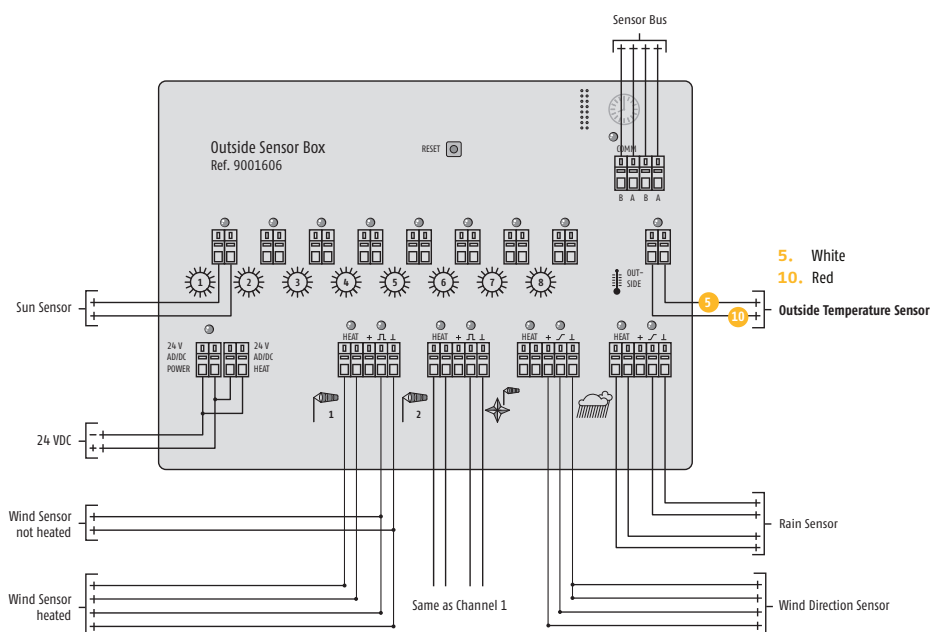

CHARACTERISTICS

Supply voltage	24 V DC (8 ... 30 V DC)
Resistance at 0°	100 Ohm
Accuracy	IEC 751 1/3 class B
Accuracy	$\pm 0.1^{\circ}\text{C} \cdot \pm 0.1^{\circ}\text{rdg}$
Outputs	4 - 20 mA@- 40 ... + 60 °C
Wiring recommendations	2 × 0.8 mm ²
Material of housing	Polycarbonate
Dimensions	Height 95 mm • Ø 85 mm
Degree of protection	IP 65
Protection class	II
Weight	234 g
Conformity	www.somfy.com/ce