



DAK

1^e

B.G.



2X2X0.8 mm - Twisted Pair

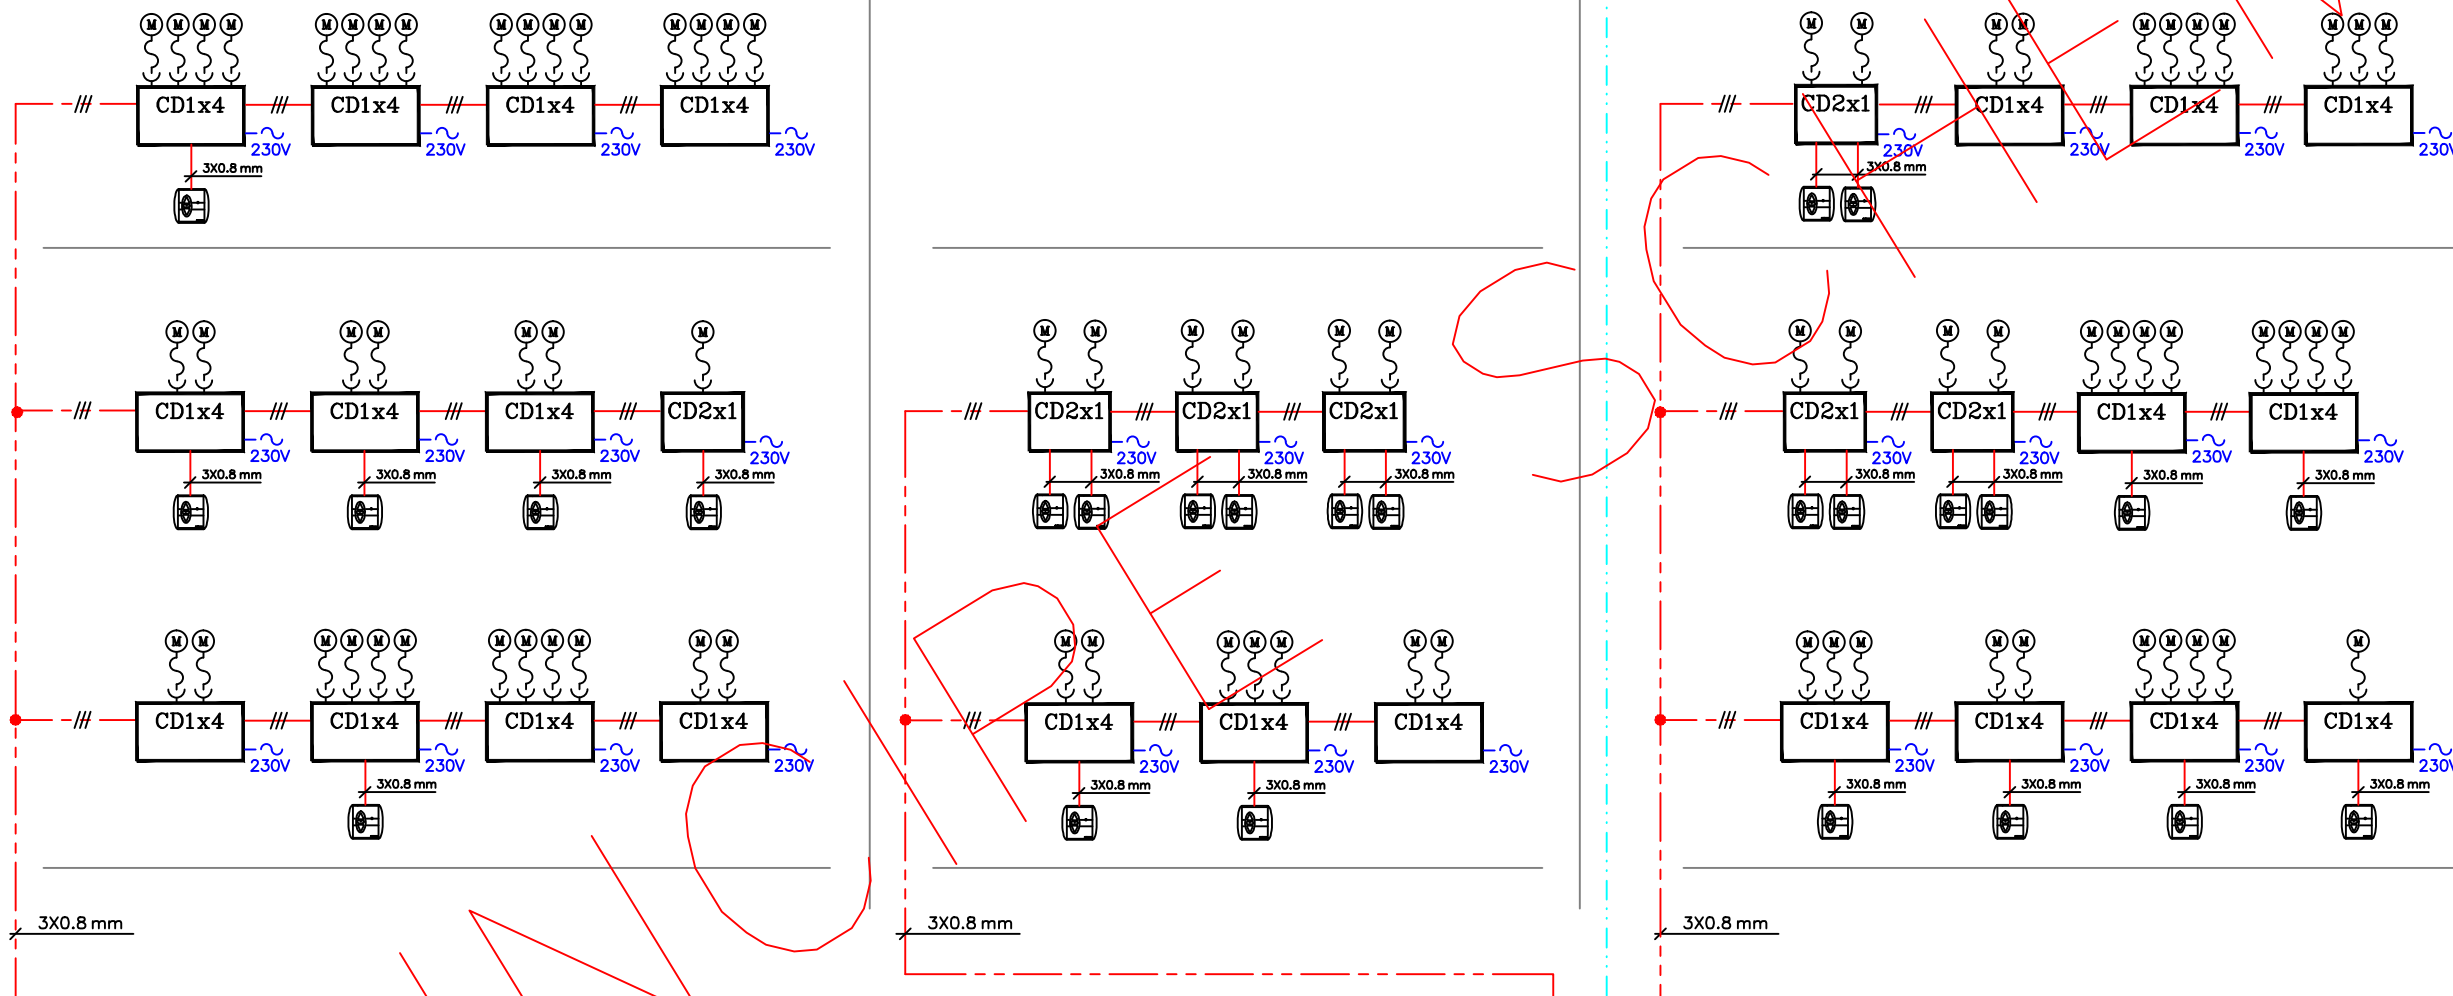

MAXIMALE BELASTING PER
SPANNINGSGROEP: 12 Ampère

- : zwakstroom — 0.8 mm
- - - : sensorkabel — 0.8 mm
- : 230 V sturing — 2.5 mm²

Kabel t.b.v. aansluiting
PC of bedieningsdisplay


Compact IB
Kast

4X0.8 mm


230V

3X0.8 mm

2X0.8 mm



Centraalschakelaars



Glazenwasserschakelaars

ONDERWERP: Blokschema Compact IB
Met Compact Sensor / CD1x4 / CD2x1
PROJECT: Principeschema

SOMFY Nederland B.V.
Diamantlaan 6
2132 WV HOOFFDORP
tel: (023) 55 44 900

somfy.
Mail: projecten@somfy.nl

SOMFY Nederland B.V.
Postbus 163
2130 AD HOOFFDORP
fax: (023) 561 58 23

Tek. nr.: 3206
DATUM: 16-06-10
BLAD: 1 AANT.: 1