





DAK

3^e

2^e

1^e

B.G.

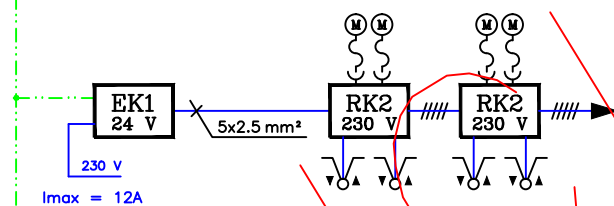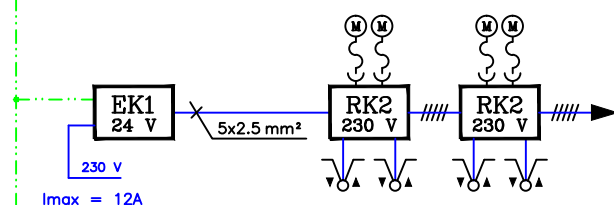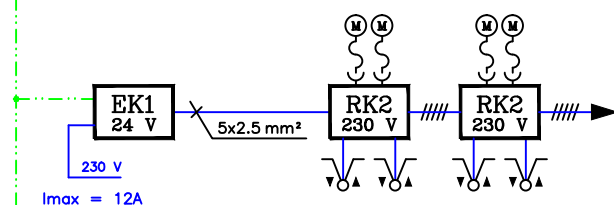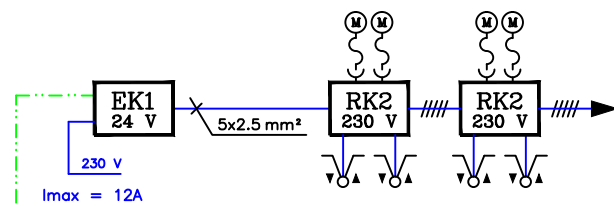

3x1.5 mm²

MAXIMALE BELASTING PER
SPANNINGSGROEP: 12 Ampère

- : zwakstroom - 0.8 mm
- : sensorkabel - 0.8 mm
- : 230 V sturing - 2.5 mm²
- : 24 V sturing - 1.5 mm²

Kabel t.b.v. aansluiting
PC of bedieningsdisplay

4x0.8 mm

Compact RK
Kast



Centraalschakelaar



Glazenwasserschakelaar




TRAFO
230/24VAC

230V

3x0.8 mm

2x0.8 mm

2x2x0.8 mm - Twisted Pair



ONDERWERP: Blokschema Compact RK
Met Compact Sensor / Ek / RK
PROJECT: Principeschema

BM

SOMFY Nederland B.V.
Diamantlaan 6
2132 WV HOOFFDORP
tel: (023) 55 44 900

somfy.
Mail: projecten@somfy.nl

SOMFY Nederland B.V.
Postbus 163
2130 AD HOOFFDORP
fax: (023) 561 58 23

Tek. nr.: 3108
DATUM: 25-08-08
BLAD: 1 AANT.: 1