

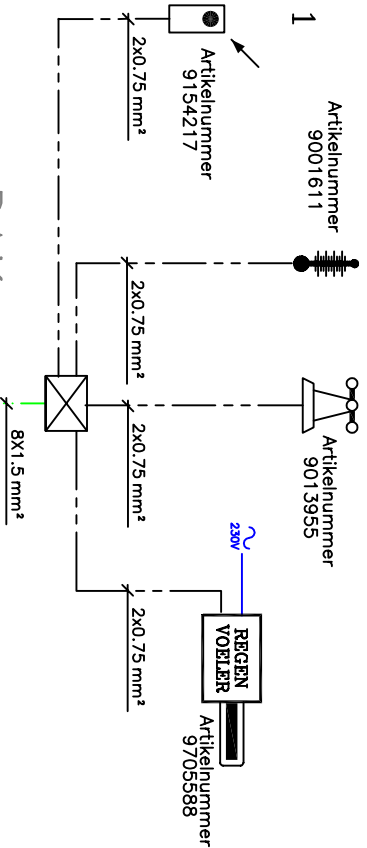


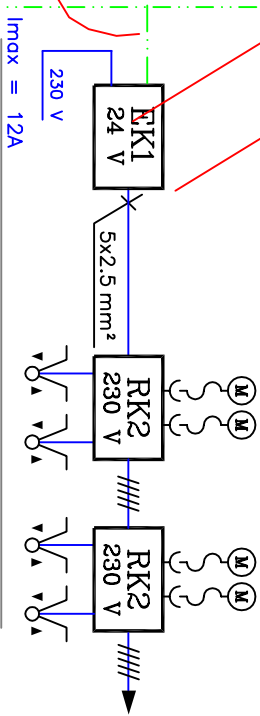

DAK

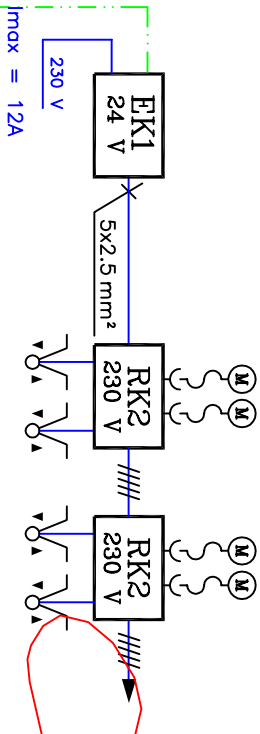


MAXIMALE BELASTING PER
SPANNINGSGROEP: 12 Ampère

— : zwakstroom — 0,8 mm
- - : 24 V sturing — 1,5 mm²
... : 230 V sturing — 2,5 mm²

CENTRALE
BEDIENING




Animeo Solo
1 groep

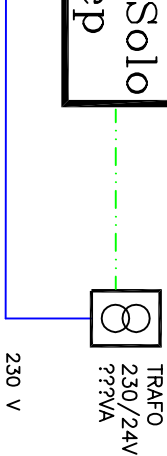

Brandmeldcontact

3x1,5 mm²

Glasenwasschakelaars

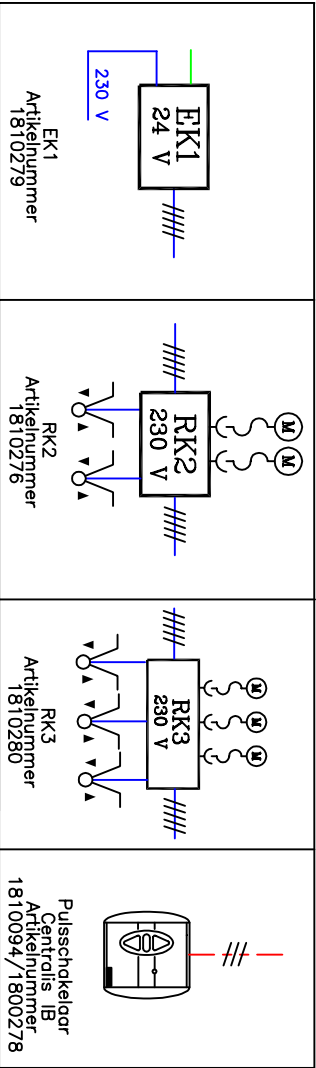

ONDERWERP: Blokschema Animeo Solo 1 groep
met EK / RK
PROJECT: Principeschema

SOMFY Nederland B.V.
Diamantlaan 6
2132 WV HOOFFDDORP
tel: (023) 55 44 900

somfy
Mail: projecten@somfy.nl

SOMFY Nederland B.V.
Postbus 163
2130 AD HOOFFDDORP
fax: (023) 561 58 23

Tek. nr.: 1102
DATUM: 12-05-10
BLAD: 1 AANT.: 1